

CT30

Desiccant Cartridge Dryer


Complete Compressed Air Treatment Center

The CT30 desiccant air dryer can be used for any point of use application where you want protection from water, oil, and dirt. The CT30 has a capacity of 30 SCFM

The built in features (shown on the right) make the CT30 dryer the most effective, economical and easy to use product on the market today. The CT30 comes fully assembled, uses no electricity, and is easy to install in your existing compressed air line. Install it near the intended point of use.

Typical compressed air is saturated with 50% to 100% relative humidity. That means that the compressed air is carrying a lot of moisture vapor when it goes into your paint gun or point of use application. Filters and traps only take out liquid water that has already fallen out of the compressed air and do nothing to protect you against the 50 to 100% moisture vapor still remaining in the compressed air.

The CT30 desiccant air dryer removes moisture vapor down to 1/2% relative humidity or a -40° degree dew point. This means NO moisture will condense into liquid water until the compressed air sees a temperature of -40° below zero.

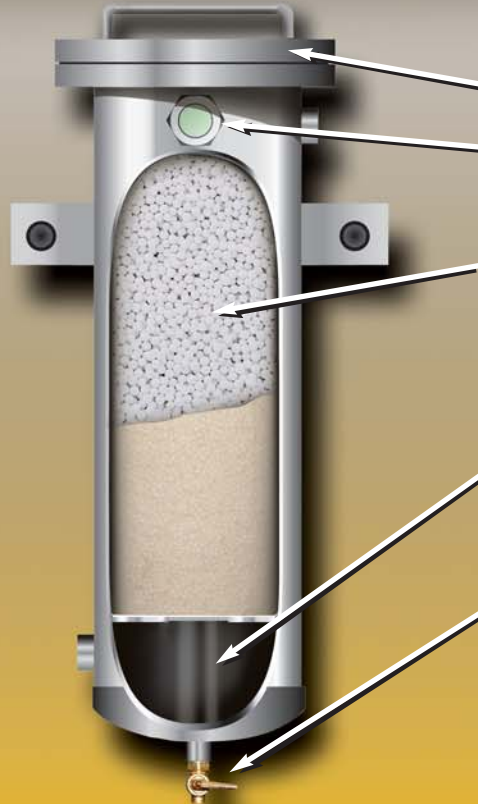

Features

Easy access 6" flange for quick desiccant changes

Moisture Indicator

Lets you know when to change desiccant cartridge.

Desiccant Cartridge

Special desiccant cartridge removes oil, water and moisture vapor from your compressed air resulting in a dew point of -40° F and relative humidity of less than 1/2%

First Stage Separator

Efficiently removes bulk water, dirt and oil, which greatly extends the desiccant life.

Drain

All brass construction for long trouble free life.

Patent Pending

Proudly Made In the USA



CAMAIR DEVILBISS

1-800-943-7924

www.camairdryers.com

